FLIGHT TRAINING





Workbook

SR-Series SR20, SR22, SR22T, & SR22TN

Edition 2

October 1, 2012

Record of Revisions

Revision #	Date	Description	
REV-2	January 15, 2013	Second release accounted for SR-22T and FIKI aircraft	

Table of Contents

Introdu	iction	1
1.	General	2
2.	Limitations	3
3.	Emergency Procedures	6
4.	Normal Procedures	11
5.	Performance	17
6.	Weight and Balance	19
7.	Airplane and Systems Description	21
8.	Handling Service & Maintenance	24
9.	Supplements	27
9.1	Internet Hyperlinks	
9.2	Turbo System	28
9.3	Precise Flight Fixed Oxygen System	
9.4	Ice Protection System	31
10.	Safety Information	

Introduction

This workbook is provided in order to introduce Cirrus pilots to the characteristics of the Cirrus aircraft.

Each of the following sections corresponds to a section in the POH. In each section you will find: quiz questions, supplemental information, and operating tips.

Visit the Cirrus Training Portal (training.cirrusaircraft.com) to obtain an electronic copy of the appropriate POH and Flight Operation Manual (FOM) for your airplane. The training portal includes power point presentations (systems presentation section) that may help to answer some of the guestions if needed.

Unless otherwise noted, all questions apply to the model of aircraft that you will be flying. If a question only applies to a certain model, it will be noted with:

- (20) for SR20
 - SR20 G3 questions will come from the appropriate section of the G3 Wing Supplement in Section 9 of your POH.
- (22) for SR22
 - SR22 G3 questions will come from the appropriate section of the G3 Wing Supplement in Section 9 of your POH.
- (T) for SR22 Turbo: Includes both turbo-normalized (SR-22 TN) and turbo-charged versions (SR-22T)
 - SR22TN turbo questions will come from the Tornado Alley Turbonormalizing System Supplement in Section 9 of your POH.
 - SR22T questions will come from the appropriate SR22T POH.
 Section 7 in the POH contains a turbo system description for the SR-22T

1. General

This section will cover Section 1 (General) of your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

- What is the wing span of your aircraft?
 Tip: Consider this when hangering your aircraft.
- 2. What is the certified max gross weight of the aircraft?
- 3. In what ways does the weight of the aircraft affect aircraft performance?
- 4. How much clearance is between the tip of the propeller and the ground?
- 5. What is your engine model?
- 6. What is the definition of reference datum?
- 7. What is the definition of arm?
- 8. What is Moment?
- 9. How does center of gravity affect aircraft performance?

1.

2. Limitations

This section will cover Section 2 (Limitations) of your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

Fill in the speeds and definitions of the following:

V _{NE} V _{NE} V _{NO} V _{NO} V _O	KIAS				
V_{FE} V_{FE} V_{PD} V_{SO} V_{S}	KIAS 50% flapsKIAS 100% flapsKIAS KIAS KIAS				
2.	What is the significance of V_{NO} and how does it differ from $V_{\text{NE}}?$				
3.	What is the significance of V _O ?				
4.	What is the significance of the green arc on the airspeed indicator?				
5.	What two speeds define the top and bottom of the green arc?				
6.	What two speeds define the top and bottom of the white arc?				
7.	During the engine break-in period what type of oil should be used?				
8.	What is the maximum takeoff altitude for the aircraft?				

What is the max operating altitude of the aircraft?

9.

10.	Can you operate the aircraft at the max operating altitude without oxygen? (FAR 91.211)					
11.	Can you operate this aircraft out of un-paved runway surfaces?					
12.	Can you fly VFR with ALT 2 INOP?					
13.	Can you fly IFR with ALT 2 INOP?					
14.	Can you fly VFR with one of the strobe lights out?					
15.	What is the significance of V_{PD} and why do you not see this in other aircraft?					
16.	Can you fly IFR with the NAV lights inoperative?					
17.	Can you fly with any of the engine instruments inoperative?					
18.	Is the aircraft approved for aerobatics/spins?					
19.	Can you operate your aircraft without removing the CAPS safety pin? (FAR 91.9)					
20.	Indicate the following Fuel Limits:					
	Approved Fuel Type					
	Total Fuel Capacity gallons					
	Total Health Fuel					
	Total Usable Fuel gallons Unusable Fuel gallons					
	Maximum Allowable Fuel Imbalance gallons					

- 21. When does the BOOST pump need to be in operation?
- 22. Can you fly with the autopilot inoperative?
- 23. How does an inoperative autopilot affect your personal minimums or go/no-go decision for an IFR flight?

3. Emergency Procedures

This section will cover Section 3 (Emergency Procedures) from your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

1.	Fill in the speeds and definitions of the following:				
(22)	V _G KIAS	Max Gross Weight 2900 lbs			
(20)		Max Gross Weight 2500 lbs			
2.	Emergency Landing Speeds:				
	Flaps Up KIAS 50% Flaps KIAS 100% Flaps KIAS				
3.	In any emergency situation, what is the remember and perform?	most important thing to			
4.	What is the procedure for a fire on engine	ne start?			
5.	How many circuit breakers would you p What are these circuit breakers labeled	•			
6.	What indicates the failure of an alternat	or?			
7.	Would you lose any equipment if you lo Distribution Diagram in Section 3) If ye				
8.	Would you lose any equipment if you lo	st ALT 2? If yes, what?			

(Electrical Distribution Diagram in Section 3)

9.	What is your aircraft's glide ratio?
10.	What is your best glide distance if you were at 6,000' AGL?
11.	A propeller governor failure can be the cause of what two situations?
12.	Is it advisable to unlatch the cabin doors with smoke or fumes in the cabin?
13. (T)	What are 2 causes of an unexplained loss of manifold pressure?
14. (T)	Is an unexplained loss of manifold pressure an emergency?
15.	What is the procedure for an emergency descent?
16.	In what situation would you use an emergency descent?
17.	What is the procedure if you have an engine failure in flight?
18.	Is flight into known icing conditions approved?
19.	What is the procedure for an inadvertent icing encounter?

SR-Series Workbook 20. The temperature at sea level is 30 degrees Celsius. Assuming the standard temperature lapse rate of 2 degrees / 1000', where do you expect the freezing level to be? 21. In an engine failure situation with the prop windmilling, how can you gain additional glide distance? 22. What is the only approved and demonstrated method for spin recovery? 23. If only the airspeed indicator is giving erroneous information, what kind of malfunction can you expect? 24. What is the corrective action for erroneous airspeed indications? Will the auxiliary fuel pump provide enough fuel to power the 25. engine in the event of an engine driven fuel pump failure? 26. What 2 conditions will turn the oil annunciator light on?

29. What procedure would you use to try to get ALT 1 back online in the case of an ALT 1 failure? What would your next step be if you could not get the alternator back online?

What is the procedure for a propeller overspeed?

What is the procedure for a cabin fire in flight?

27.

28.

SR-Serie	s Workbook
30.	What is the approximate expected impact from a parachute drop?
31.	If activation of the CAPS system is necessary, what kind of motion do you want to use when pulling the handle?
32.	With an engine out will full flaps increase or decrease your glide distance?
33.	If you lose the audio panel, will you lose the ability to communicate with ATC?
34.	When landing without elevator control what speed should you trim the aircraft for?
35.	Your ALT 1 annunciator light illuminates 30 minutes from your destination at night. What equipment would you turn off to reduce the load on Battery 1?
36.	What is the procedure for a brake failure during taxi? 1) 2) 3)
37.	What is the procedure for single and dual brake failures in flight
Single	e Failure Dual Failure

38. If you suspect a brake failure, how wide and long should the landing runway be? (What are your personal minimums?)

Questions 40-48 relate to high altitude physiology. Please reference the Cirrus training Portal, the Pilot's Handbook of Aeronautical Knowledge, or the Aeronautical Information Manual (AIM) for guidance.

- 39. List 5 possible symptoms of hypoxia.
- 40. What are 3 possible causes for hypoxia?
- 41. (True / False) The onset of hypoxia is easy to identify.
- 42. (True / False) Symptoms of hypoxia are identical for everybody.
- 43. What is the proper treatment for hypoxia?
- 44. **(T)** At 22,000' MSL, you recognize symptoms of hypoxia. The oxygen system flow meter indicates no flow of oxygen from the oxygen tank to your mask. The quantity indicator on the oxygen indicates zero PSI.

What is the proper way to treat hypoxia for the given scenario?

Is the above scenario an emergency?

What is the possible result if no action is taken?

- 45. What is the recommended altitude for use of oxygen for day and night time? (AIM Chapter 8)
- 46. When are pilots required to use oxygen? (FAR 91.211)
- 47. When must oxygen be made available to passengers? (FAR 91.211)

4. Normal Procedures

This section will cover Section 4 (Normal Procedures) from your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

the following:
Normal
SL
10,000'
SL
10,000'
Max Gross Weight
2900 lbs
Max Gross Weight
2600 lbs
2200 lbs
KIAS
KIAS
KIAS
KIAS
Knots
ould be the normal voltage

- 3. How many points are you able to drain fuel from?
- 4. What items would you brief your passengers on during a passenger briefing?
- (True / False) You will start the engine with both batteries and both alternators on.
- 6. After start up, how soon should you see a change in oil pressure?
- 7. What are the max cranking intervals for the starter?

- 8. The Taxiing Checklist has you check some of the instruments while taxiing. What are these instruments and what are you checking for?
- (True / False) Directional control during taxi operations is best achieved by differential braking where full rudder authority is used before brakes are applied.
- (True / False) Excessive use of the brakes can result in overheated brakes which may result in brake failure or system failure.
- 11. (True / False) You need to maintain at least 1000 RPM while taxing the aircraft.
- 11. Before doing your run-up, you want the oil temperature to reach what temperature?
- 12. If no drop in RPM is noted on the magneto check, what is the probable cause?
- 13. What is the procedure for setting the mixture for maximum power when taking off from high altitude airports?
- 14. Normal takeoffs can be performed with which flap setting(s)? Short and soft field takeoffs?
- 15. Flap retraction after takeoff from 50% to 0% is done at or above what minimum speed?
- 16. What is the recommended cruise climb airspeed?


17.	(T)	What is the corrective action if the manifold pressure exceeds 32" (TN) or 37" (T) inches during takeoff?
18.	(T)	List the procedures for a Rich of Peak (ROP) climb.
19.	(T)	List the procedures for a Lean of Peak (LOP) climb.
20.	(T)	(True / False) Leaning the mixture control when operating lean peak EGT will cause the CHT's to increase.
21.	(T)	What is the corrective action if CHT's exceed 380° F (TN) or 420° F (T) during a LOP climb?
22.	(T)	What is the maximum altitude a Lean of Peak (LOP) climb can be used (TN only)?
23.		The climb checklist should be completed no lower than what altitude? (Flight Operations Manual)
24.	(T)	List the procedure for setting cruise power. Throttle Mixture Boost pump

of

25. (T)	When should the boost pump be turned off during cruise?
26.	(True / False) The fuel BOOST must be used when switching tanks?
27. (T)	CHT's should be kept above what temperature during descent?
28. (T)	List 3 factors that affect CHT cooling during descent?
29. (T)	What power setting can be used during descent?
30.	The descent checklist should be completed by what point? (Flight Operations Manual)
31.	What distance from the destination airport should you start a descent from 17,500' MSL to a traffic pattern of 2,500' MSL with a groundspeed of 180 knots when using:
	a. 500 fpm descent NM
	b. 1000 fpm descent NM
32.	(True / False) The mixture should be full rich and boost pump on before landing.
33.	(True / False) Normal landings are not allowed with 0% or 50% flaps.
34.	On a crosswind landing, at what point will you transition from a wings-level crab angle into a sideslip?
35.	Power goes to what setting on a balked landing/go-around?

SR-Serie	s Workbook
36.	When do you perform the after landing checklist? (Flight Operations Manual)
37.	(True / False) The mixture should be leaned for taxi.
38. (T)	(True / False) Turbo cool down is necessary before engine shutdown.
39.	At what point should you hear the stall warning horn?
40.	How long do you prime the engine for the following starts? o Normal seconds o Cold seconds o Hot seconds
41.	Below what temperature should external preheat or external power be used for start?
42.	On start up the engine has intermittent firing and small puffs of black smoke rise from under the aircraft. What is the probable cause and corrective action?
43.	You have misjudged your approach to landing due to winds, and it appears you will land longer than you anticipated. What is your best course of action?

44. Complete the traffic pattern diagram below by labeling the appropriate; **airspeed**, **power setting**, and **flap setting** for each section of the traffic pattern. (FOM)

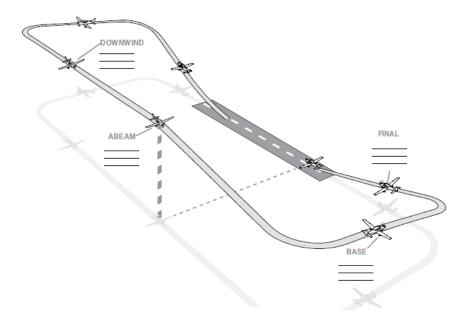

5. Performance

This section will cover Section 5 (Performance) from your Pilots Operating Handbook.

Use the following information to answer the questions:

Route: Rapid City, SD (KRAP) → Duluth, MN (KDLH)

Distance: 487 NM

Magnetic Course: 070 degrees

Weight at Takeoff: Max Gross Weight

Fuel: Full

Cruise Power Setting: (20, 22) 75% Best Power

(T) 85% Lean of Peak

Weather Conditions:

KRAP 101250Z 22026KTG35 10SM FEW010 SCT020 30/17 A2975

KDLH 101250Z 33020KT 10SM SCT010 20/10 A2982

Winds aloft:

	3000	6000	9000	12000	18000
DLH	2925	253415	253704	264201	2754-03
GFK	302610	263309	253708	254205	265001
FSD	2923	263214	272907	283502	2841-01
RAP		283417	303309	304003	314900

Airport Information:

KRAP Elevation 3202 ft

Rwy 23/05 3600 ft Rwy 32/14 8701 ft

KDLH Elevation 1420 ft

Rwy 27/09 10,152 ft Rwy 03/21 5699 ft

- 1. What will be your takeoff distance (ground roll) departing KRAP?
- What is your x-wind component for runway 32 at KRAP?
- 3. What altitude will you use and why?
- 4. In addition to winds aloft, what other factors should be considered when selecting a cruise altitude?

- 5. What will be your average climb rate out of KRAP to your selected cruise altitude?
- 6. What will be your endurance for today's flight?
- 7. **(T)** What is the O2 duration for 15,000ft with 3 persons onboard?
- 8. What will be your calculated KTAS and fuel flow for cruise flight?
- 9. How much fuel will you have once you reach your destination?
- 10. Will you be able to make your destination non-stop? SAFELY? (Difference between FAR's and personal minimums)
- 11. What will be your landing distance (ground roll) at KDLH?
- 12. What is the KCAS at 100 KIAS with 100% flaps?
- 13. What will your KIAS stall speed be on departure with 50% flaps and an AFT CG?
- 14. What is the difference between takeoff rate of climb vs. en route rate of climb?

6. Weight and Balance

This section will cover Section 6 (Weight and Balance) from your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

Aircraft information:

Basic Empty Weight: (22) 2400 lbs (20) 2135 lbs **Moment:** (22) 326.563 (20) 301.758

Payload:

Pilot 160 lbs Front Pax 160 lbs Rear Pax 200 lbs Baggage 130 lbs

Fuel Full Fuel

NOTE: You cannot leave anyone or any baggage behind.

You may use the following table to aid in calculations. For Moment/1000, refer to loading table in POH.

	Description	Weight	Moment/1000
1.	Empty Weight Includes unusable fuel & full oil		
2.	Front Seat Occupants Pilot and Passenger		
3.	Rear Seat Occupants		
4.	Baggage Area 130 lb maximum		
5.	Zero Fuel Condition Sub total items 1 thru 4		
6.	Fuel Load (22) 92 Gallon @ 6.0 lb/gal maximum (20) 56 Gallon @ 6.0 lb/gal maximum		
7.	Ramp Weight Sub total items 5 and 6		
8.	Fuel for Start, taxi, and runup (22) Normally 9 lb at avg moment of 1394 (20) Normally 6 lb at avg moment of 922.8		
9.	Takeoff Weight Subtract Item 8 from item 7		

SR-Series	s Workbook
1.	What is your ramp weight?

- 2. What is your aircraft's zero fuel weight?
- 3. What will be your aircraft's gross takeoff weight?
- 4. Is this below the certified maximum gross weight?
- 5. Will your aircraft be within CG limitations?
- 6. How much fuel will you have on board before takeoff to remain within the weight and GG envelope?

_____ Gallons ____ Lbs

- 7. Is unusable fuel and oil included in basic empty weight?
- 8. Where is the aircraft Datum?

7. Airplane and Systems Description

This section will cover Section 7 (Systems) from your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

1. What are the three flap settings?

%	0
 %	0
%	0

- (True / False) The horizontal stabilizer is a two piece unit attached at empennage.
- 3. (True / False) It is possible to have an asymmetrical flap deployment in a Cirrus aircraft.

 Hint: Look at the flap control diagram.
- 4. Why are Cirrus aircraft not equipped with gust locks?
- 5. (True / False) The autopilot also uses the electric roll trim.
- 6. The landing gear struts are made of what?
- 7. Below what temperature does the oil bypass the oil cooler?
- 8. What is the recommended extended flight oil level for the engine?
- 9. Where is the alternate air control knob? Does a SR22 TN or SR22T have an alternate air control knob? Why?
- 10. What will cause an OIL warning light to illuminate?
- 11. Describe when oil is metered into and out of the prop hub.

12.	What pulls the fuel from the collector tanks?
13.	How much fuel is held in each collector tank? (CATS)
14.	What situation will cause the FUEL QTY caution light to illuminate?
15.	(True / False) If one tank is at 4 gallons and the other tank is at 17 gallons, the FUEL caution light will illuminate.(Avidyne Aircraft only)
16.	Alternator #1 is rated for: Amps Volts
17.	Alternator #2 is rated for: Amps Volts
18.	Battery #1 is rated for: Amp-hours Volts
19.	Battery #2 is rated for: Amp-hours Volts
20.	Output from alternator #1 is connected to which bus(es)?
21.	Output from alternator #2 is connected to which bus(es)?
22.	How are the main distribution bus(es) and essential distribution bus connected?
23.	What is the purpose of the diode between the distribution buses?

	_						
CD	'-Ser	·i ^ ^	1/1	ar	/h	\sim	ı.
วห	⊃∺ı	165	νv		ĸu	,,,,,,	r

- 24. You are on the ground with only BAT 2 on. What indication do you get if the isolation diode has failed?
- 25. When only battery #1 is turned on, which buses are energized?
- 26. When only battery #2 is turned on, which buses are energized?
- 27. What does an ALT annunciator mean?
- 28. The back seat passengers are cold. How do you go about setting the heat and ventilation knobs to direct the maximum amount of warm air to your passengers?

 Hint: Look at the heating & ventilation diagram.
- 29. What kind of stall warning system is installed on Cirrus Aircraft?
- 30. When practicing power off stalls with full flaps, at what IAS would you expect to hear the stall horn?
- 31. What is the expected amount of force required when pulling the CAPS handle?
- 32. What kind of pull on the handle works best when activating the CAPS system?
- 33. What kind of descent rate can you expect with a parachute deployment?

1.

8. Handling Service & Maintenance

the aircraft at all times?

This section will cover Section 8 (Service and Handling) from your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

What are the five documents required by the FAA to be onboard

	1) 2) 3) 4) 5)
2.	What are the two recommended procedures for you to verify if your airplane conforms to all Airworthiness Directives? Hint: It is also possible to get this information from http://www.faa.gov on the web.
3.	If an annual inspection was done on your aircraft May 16, 2012, when will the next inspection will be due?
4.	After completing any of the work described as preventative maintenance in the POH, what are the required logbook entries you must make?
5.	Should you use external power to start the airplane if it has a "dead" battery?
6.	How often should the brake fluid be inspected and replenished?
7.	How often should the brake linings be inspected and replaced?

8.	While taxiing, how is steering is accomplished?
9.	When moving your Cirrus around on the ground you should ALWAYS use a
10.	Where is the hydraulic brake fluid reservoir located?
11.	What is the proper tire pressure? Nose Gear psi Main Gear psi
12.	After the engine break-in period, what is the recommended time between oil changes?

13.	The fuel filtration screen in the gascolator must be cleaned every
	hours of operation.

- 14. (True / False) A fuel sample is required to be taken prior to each flight.
- 15. (True / False) Battery 1 is located aft of the baggage compartment.
- 16. What should you use when washing the exterior of the aircraft?
- 17. When cleaning any of the windows, what do you <u>not</u> want to use?

9. Supplements

This section will cover Section 9 (Supplements) from your Pilots Operating Handbook, unless otherwise noted.

Note: Specific avionics usage will be discussed in other training material and during training with your Cirrus Instructor.

Note: We recommend that you download the specific information manual for each piece of equipment because of the diversity and complexity of the various avionics utilized in Cirrus aircraft. Some will be included in your training kit and all will be included with your airplane.

9.1 Internet Hyperlinks

Pilots Operating Handbooks and supplements can be downloaded from the following websites:

• Cirrus Training Portal

(Follow links to the training portal)

http://training.cirrusaircraft.com

Cirrus Aircraft

http://www.cirrusaircraft.com

Avidyne Avionics

o http://www.avidyne.com

Garmin Avionics

http://www.garmin.com

L-3 Avionics Systems

o http://www.as.l-3com.com

• S-Tec / Meggit

http://www.s-tec.com

Turbonormalizing System

http://www.taturbo.com

Oxygen System

http://preciseflight.com

Note: Only answer the questions for the systems that are in your aircraft.

9.2 Turbo System SR22 TN and SR22T

Before conducting training you will need to be familiar with the following:

- Limitations of the system
- Basic operating principles of turbo-normalizing and turbocharged systems

Note: The answers to these questions can be found in your supplement and the appropriate turbo presentation found in the Cirrus Training Portal. For SR22T aircraft refer to section 7 of your POH

- 1. What is the purpose of the intercooler/aftercooler?
- What could cause an over-boost situation?
- 3. What is the maximum Turbo Inlet Temperature (TIT)?
- 4. What is the maximum certification altitude?
- (True / False) A closed wastegate sends more exhaust through the turbo.
- 6. (True / False) An open wastegate allows exhaust to bypass the turbo and be dumped overboard.
- 7. Does the turbo have a critical altitude?
- 8. While the engine is idling on the ground, is the wastegate open or closed? Why?
- 9. (True / False) The mixture should be leaned for take off at higher density altitudes to compensate for the decreased pressure.
- 10. As the aircraft climbs to 25,000' from SL, what happens to the wastegate? Will the wastegate be fully closed at 25,000' MSL?

11.	For increased engine life, CHT's should be kept below °F
12.	Avoid continuous operations with the fuel flow set between GPH and GPH with MP above in. Hg. (TN aircraft only)
13.	After completing the cruise checklist, the boost pump should remain on for min. Why? (SR22TN)
14.	(True / False) Leaning the mixture will cause the CHT's to rise when operating lean of peak.
15.	While climbing at 120 KIAS during a lean of peak climb, the CHT's exceed 380° F (SR22TN) or 420° F (SR22T). What is the appropriate response?
16.	What if the CHT's cool below 380° F (SR22TN) or 420° F (SR22T) but the climb performance is not acceptable? What is the appropriate action?
17.	After setting cruise power at 85% (2500 RPM / Max MP (SR22TN) 30.5" (SR22T) / Fuel Flow cyan target) and the CHT's remain at 395° F (SR22TN) 425° F (SR22T). What is the correct action?
18.	What is the appropriate course of action in the event of an unexplained loss of manifold pressure?
19.	Shortly after leveling off at 22,000' you set cruise power, lean the mixture, and turn your boost pump off. Your engine fails.
	What do you do?

Why did the engine fail?

9.3 Precise Flight Fixed Oxygen System

http://www.preciseflight.com

Before conducting your training you will need to know how to accomplish the following basic functions.

Calculate oxygen duration using the table in the supplement.

Note: It is recommended that you utilize a Pulse Oximeter for high altitude operations to ensure the proper blood oxygen saturation and to prevent hypoxia.

- 1. The O_2 required light will come on if the system is not selected on by what altitude?
- What does a steady fault light indicate?
- 3. What does a flashing fault light indicate?
- (True / False) The system will continue to operate normally when a steady fault light is observed.
- 5. The oxygen quantity display indicator will flash red when bottle pressure falls below what psi?
- (True / False) If you have an ALT 1 Failure, you will need to conserve battery power for continued operation of the oxygen system.
- 7. Cannulas are certified for flight up to what altitude?
- 8. What is the recommended blood saturation level to be at or above in flight?
- 9. How many hours of oxygen use can you expect cruising at 17,000 ft with 3 people on board and a full oxygen tank?

9.4 Ice Protection System

Before conducting training you will need to be familiar with the following:

- Limitations of the system
- Knowledge of effects of airframe icing
- Pilots operating Flight Into known Icing (FIKI) approved airplanes are required to complete the online training course found in the Cirrus Training Portal (training.cirrusaircraft.com)
- 1. Is flight into known icing approved for your aircraft?
- What is the total deicing fluid capacity for your airplane?
- The Pitot Heat should be limited to ____seconds on the ground? (FIKI)
- 4. What is the minimum dispatch fluid quantity? (FIKI) How much endurance (time) do you have at the three different modes? (when at the minimum dispatch level)
- Describe how and when to use the different modes of the ice protection system. What are the endurance times for the different TKS modes available for your aircraft? Assuming full TKS on departure
- 6. During an approach to landing with ice conditions present, what changes would you make to your landing procedures?
- 7. What should be your airspeed during an icing encounter? Max Speed? Minimum Speed?

Hint: During certain flight conditions, such as at higher operating altitudes and/or higher airspeeds, the stagnation point on the leading edge of the wing (the point where the airflow splits) will move up and aft enough to hinder the deicing fluid from flowing adequately along the top surface of the wing.

8. How often should the system be run to prevent the porous panel membranes from drying out?

Hint: Pre-flight procedures for the ice protection system are not listed on the standard paper or MFD checklists, but are in the supplements section of the POH. Additional attention should be given to operation and pre-flight of the system ensuring it is primed, especially when flying into instrument conditions or precipitation.

- 9. During preflight weather analysis, what weather product(s) will help a pilot to determine icing potential along your route of flight?
- 10. If icing conditions are encountered in cruise, what actions should the pilots take?

11. What is the definition of "known icing"?

Note: This answer is not in the POH. This is an important issue; Cirrus recommends that you do further reading about icing at the following websites:

- AOPA: Safety Advisors
 - http://www.aopa.org/asf/publications/advisors.html
- NASA GRC Icing Branch
 - http://aircrafticing.grc.nasa.gov
- AVweb: Aviation Magazine and News Service
 - http://www.avweb.com/news/airman/181877-1.html

10. Safety Information

This section will cover Section 10 (Safety Information) from your Pilots Operating Handbook. Answers to all questions will be found in the appropriate section of the POH, unless otherwise noted.

Regarding the Cirrus Airframe Parachute System (CAPS):

- 1. What is the significance of the V_{PD} (max parachute deployment speed) and what is the numerical value?
- 2. What factors do you need to take into account if the parachute is to be deployed?
- 3. List scenarios when activation of the CAPS might be appropriate?

Tip: There is no minimum deployment altitude. This is because the actual altitude loss during a particular deployment depends upon the airplane's speed, altitude and attitude at deployment as well as other environmental factors. As a guideline, the demonstrated altitude loss from entry into a one-turn spin until under a stabilized parachute is 920 ft. Altitude loss from level flight deployments has been demonstrated at less than 400 ft. The recommended cut-off decision altitude is 2,000' AGL.

